



Shure Beta 58A

The Shure Beta 58A dynamic vocal microphone is precision-engineered for professional live sound reinforcement and studio recording applications. A tailored frequency response accentuates clarity of vocals and a tight supercardioid pattern ensures high gain-before-feedback, maximum isolation from other sound sources and minimum off-axis tone coloration.



Physical

Size of Unit	160H x Ø50mm
Item Weight	0.278kg
Size of Unit Cased	246W x 114H x 55D mm
Cased Weight	0.40kg
Quantity in Case	1

Electrical

Rated Power	N/A
Input Power	N/A
Power connection	N/A
Phantom power	No

Mounting Options

Mic Clip	Yes
Desk Stand	No
Lectern	No
Rack Mountable	No

Outputs

Type	1x XLR Output
------	---------------

Parameters

Type	Dynamic/Condenser	Dynamic (moving coil)
Frequency Response		50 to 16,000 Hz
Polar Pattern		Supercardioid
Sensitivity		-51 dBV/Pa (2.8 mV)
Output Impedance		150 Ω
Connector		3-Pin XLR (Pin 2+)

Environmental

IP Rating	N/A
Cooling	N/A
Max Operating Temperature	N/A

Accessories Included

Microphone pouch
Mic Clip

Compatibility



Frequency response tailored for vocals, with brightened midrange and bass roll off to control proximity effect

Information Links


Manufacturer Link [Shure Beta 58A](#)

Data Sheet [Spec Sheet](#)

Data Sheet [User Manual](#)

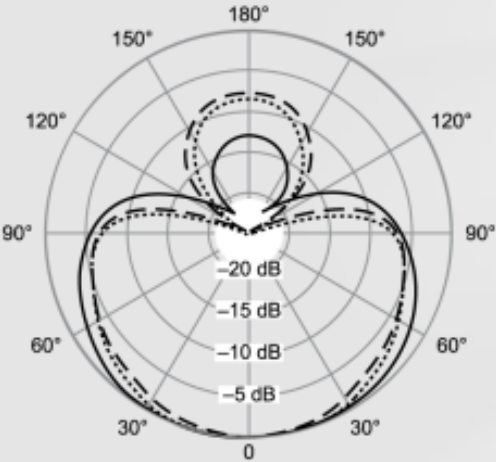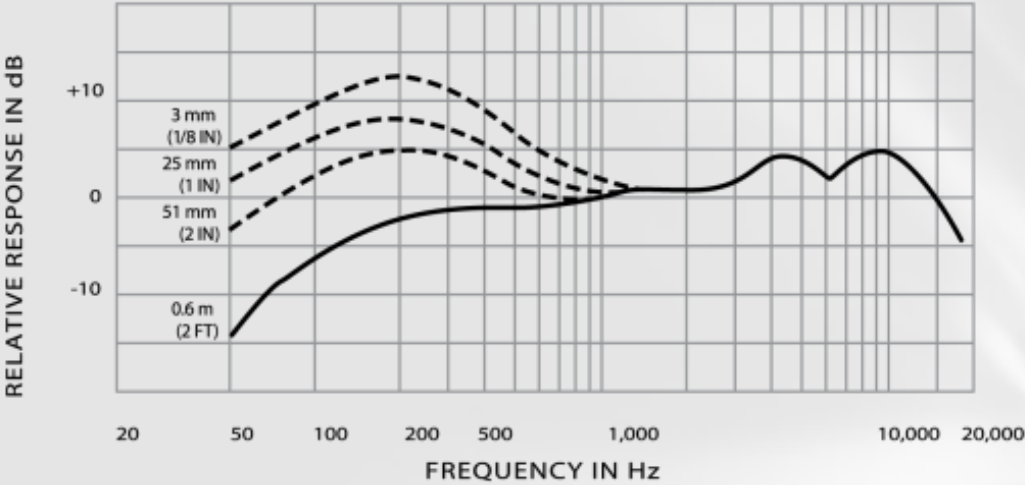

— 250 Hz
..... 500 Hz
- - - 1000 Hz

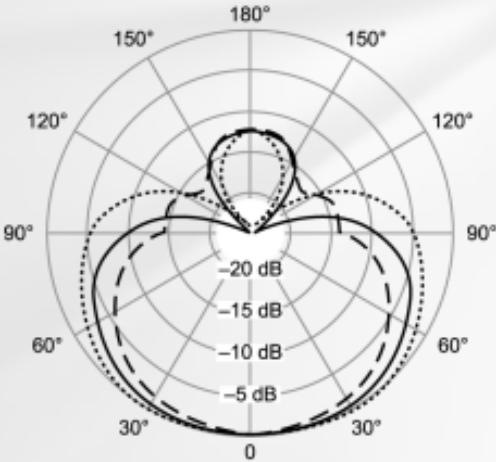

— 2500 Hz
..... 6300 Hz
- - - 10000 Hz